
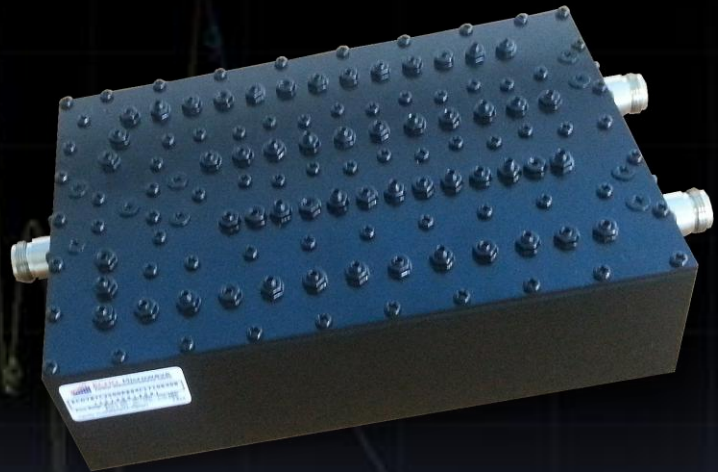


16/July/2013

Dear Valued Customer,

We are very pleased to announce that Cavity 4-plexer with two-port configuration. This unit covers frequency range of 698~787/2500~2700 MHz in Port 1 and 824~894/1710~2155 MHz in Port 2 and 0.8 dB, max insertion loss. These features enable to be used in BTS with band crowded environment.

Cavity Multiplexer (4-plexer)

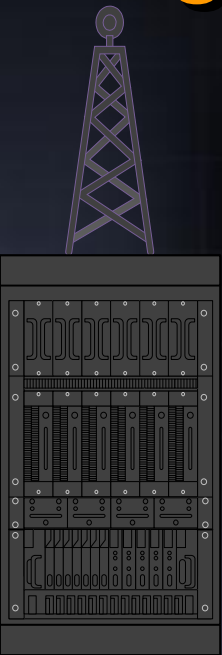

- High Performance and Reliability
- Compact Size and Cost Effective Solutions

PR Contact: S.J. Cho

sjcho@echomicrowave.com

Star Tower #1207, Sangdae-won-dong 223-25, Jungwong-gu, Sungnam-si,
Gyeonggi-do R.O. Korea

+82-31-8018-5010 phone

+82-31-8018-5011 fax

www.echomicrowave.com

ECHO Microwave is an innovative designer and manufacturer of high performance RF passive devices.